



Hanging Type Exhaust Fan


Features:

- 1) Frame: made of galvanized steel sheet, one-off molded, anti-corrosive and durable.
- 2) Blade: 6 pieces of mirror finished stainless steel blades, attractive and durable with big air volume, low noise, no distortion, no broken.
- 3) Motor: Siemens motor or Chinese motor, high efficient and energy-saving with CCC certificate. Protection class: IP55, Insulation class: F. The voltage, power, HZ and phase can be customized.
- 4) Belt pulley: made of aluminum magnesium alloy by injection molding, reducing the weight of blade and impeller, high corrosion resistance, eliminating internal stress to improve its own rigidity and stability, high strength.
- 5) Bearing: imported double-row bearing, super mute, high intension and durable, adopting special waterproof design, high intension, low noise, maintenance-free and long service life.

Parameters:

Model specifications	Diameter blades- mm	Blades rotational speed- rpm	Motor rotational speed- rpm	Air flow m3/h	Total Pressure- Pa	Noise decibels	Import power - W	Rated voltage- V	High mm	Width mm	Thick mm
EOF(e)-900	750	630	1400	22000	65	≤65	370	380	900	900	420
EOF(e)-1000	900	610	1400	30000	70	≤70	750	380	1000	1000	420
EOF(e)-1100	1000	600	1400	32500	70	≤70	750	380	1100	1100	420
EOF(e)-1220	1100	460	1400	38000	73	≤70	750	380	1220	1220	420
EOF(e)-1380	1250	439	1400	40000	56	≤70	1100	380	1380	1380	420
EOF(e)-1530	1400	325	1400	55800	60	≤70	1500	380	1530	1530	420

Air Curves:

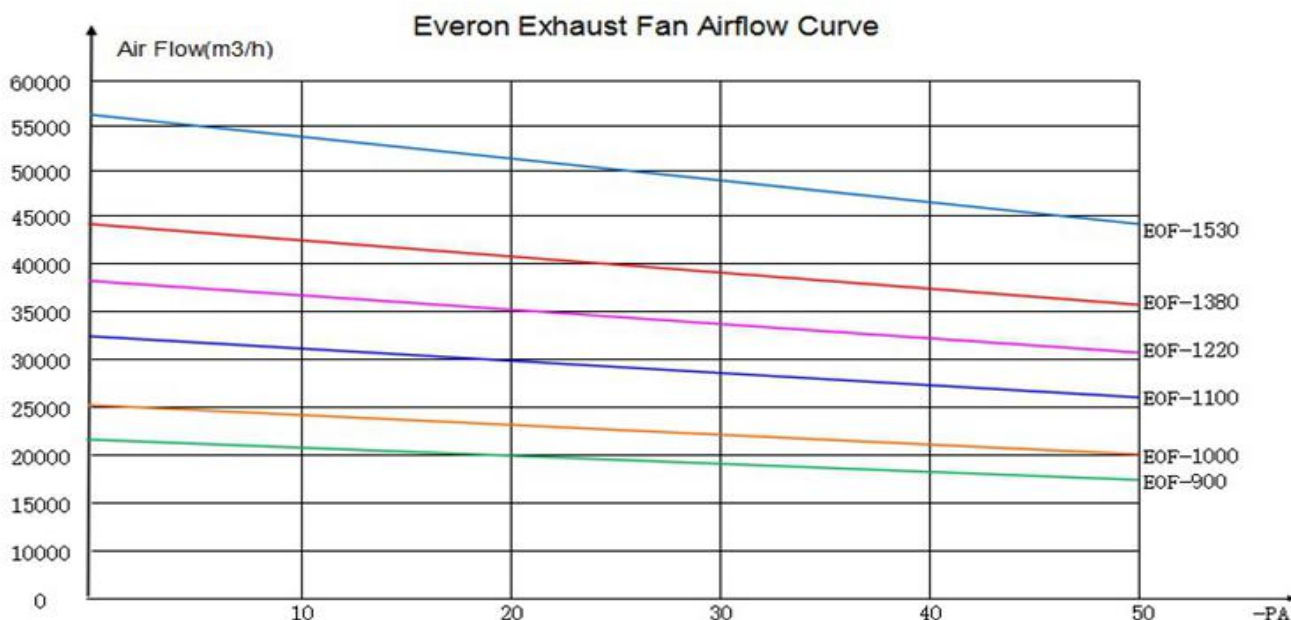



Frame: 1.0mm,180g/m2 Hot Dip Galvanized

Collector: 0.7mm,180g/m2 Hot Dip Galvanized


Blade: 430 Stainless Steel,1.2mm thickness

Belt wheel: Magnesium Aluminum Alloy

Belt: Sanlux/Dongil/Mistuboshi are available

Mesh: Galvanized&Plastic Sprayed

Motor: Simens/ABB/Laoyite/Nosch

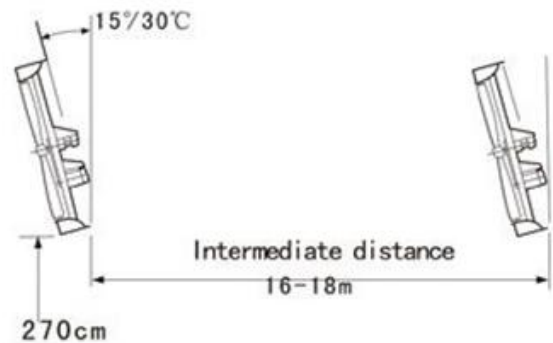

风机安装示意图 Installation Diagram

